
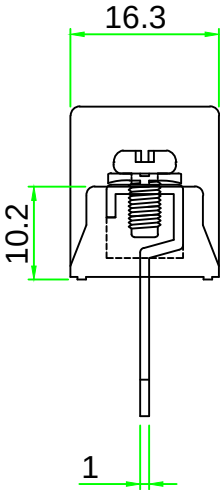
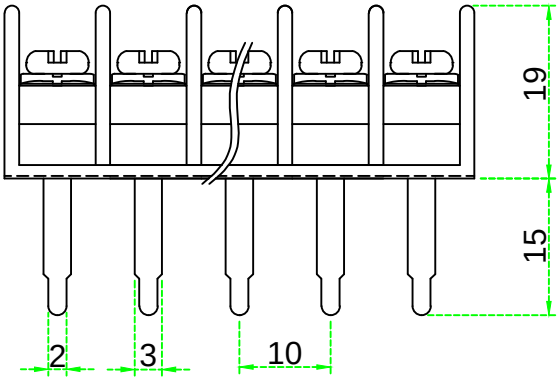



1					2					3					4				
4						Current rating					AC250V 18Amp								
3	Screw	Steel	Ni	M3.5		Insulation resistance					1000M Ohms of More at DC500V								
2	Terminal	Brass	TIN	1/2H		Withstand voltage					AC2000V/Minute								
1	Base	PBT		UL94V0		Wire range					AWG #12~22								
	Part Name	Material	Plating	Remark		Torque					6.9 lb-in								

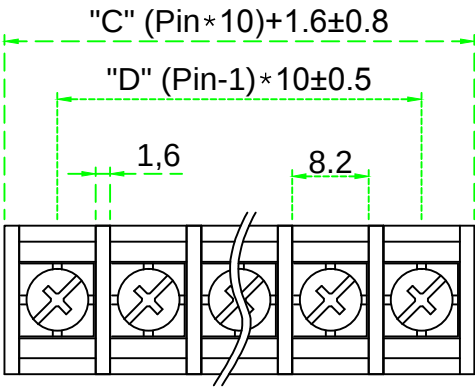

PCB hole Dia: ø2.5

Note.

- 1. One Mold 최대 핀수: 20Pin
- 2. Base 연결용 최대 핀수 : ∞
- 3. Base 연결용은 마지막에 End cover 사용시 1.4mm 커짐
- 4. Cover 사용시 모델No. : BI-10A-1S1TC-*P_(Option)

- 5. Hole Pin  : (Option)

- 6. 지시하지 않은 공차: GENERAL TOLERANCES

GENERAL TOLERANCES				Part Name.		Dwg No.	
0 ~ 50	±0.3		Terminal block		BI-10A-1S1T-*P		
50 ~ 100	±0.5						
100 ~ 150	±0.8		Drawing BY.	Checkd BY.	Approval BY.	Sheet No.	of
150 ~ 200	±1.0					(주)부일일렉트로닉스 BUIL ELECTRONICS CO., LTD. www.ebuil.com	
Scale /							
Materral							
Finish							
1		2		3		4	